

Ordering code

Seals

Code	Seals
omit	NBR
V	FPM

DSDU

Pressure relief valve

Type code

Type Code 578 P20
Q_{max} [l/min] depending on opening pressure
220
240
265
300
320
345
370

Pressure stage

Pressure stage
B
E
G
K

TÜV

Desired opening pressure in bar (please specify)


Opening pressure ranges [bar]
50 - 75
76 - 125
126 - 175
176 - 200
201 - 250
251 - 300
301 - 350

Bold letters =
Short-term availability


Ordering Examples

DSDU 578 P20 - 120bar matches Q_{max} 240 l/min, opening pressure 120bar
DSDU P578 P20 - 150bar matches Q_{max} 265 l/min, opening pressure 150bar

p/Q curve

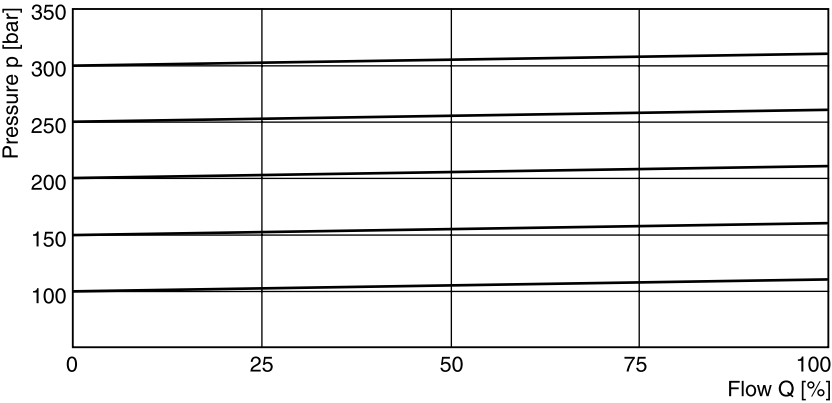


DSDU*P20

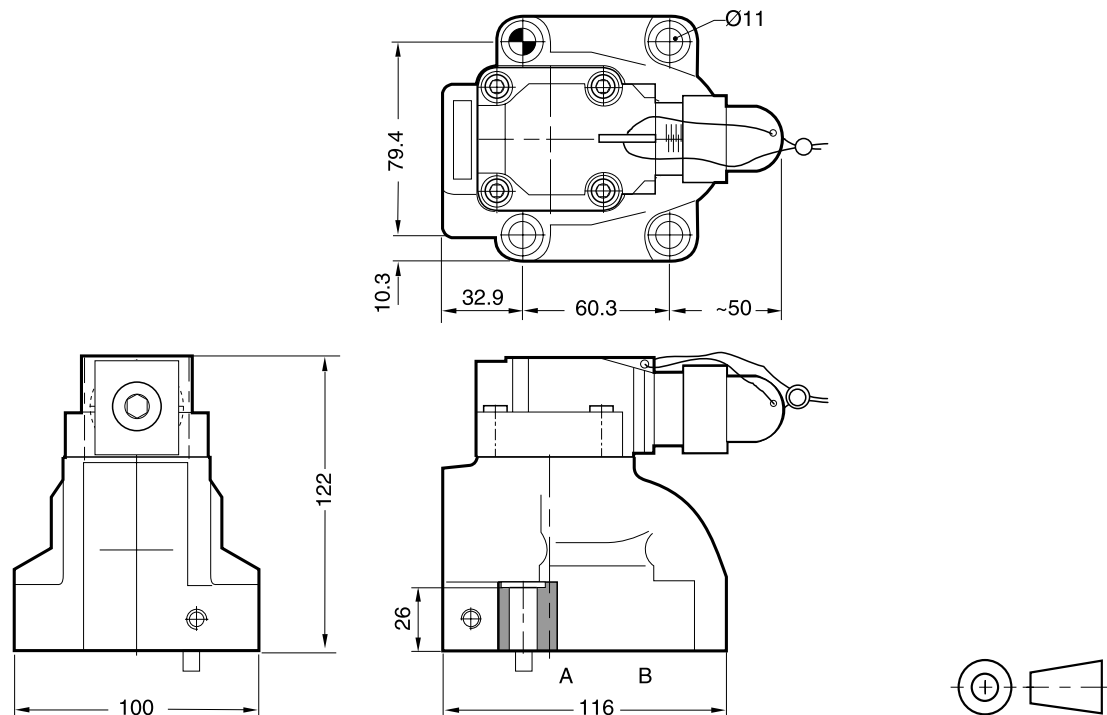

4

Size	Bolt kit			Kit	
				NBR	FPM
P20	BK 388	4x M10 x 40 DIN 912 12.9	63 Nm ±15%	SK-DSDU5P20	SK-DSDU5P20V

Mounting pattern ISO 6264-08-11-*-97

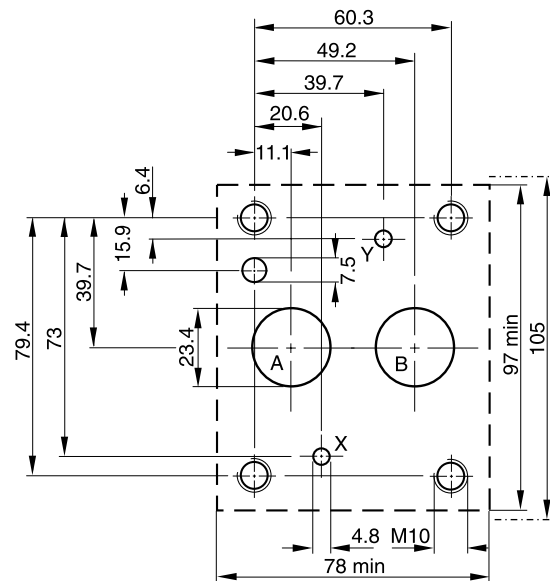

Tolerance at pin holes and screw holes ±0.1, at port holes ±0.2.